


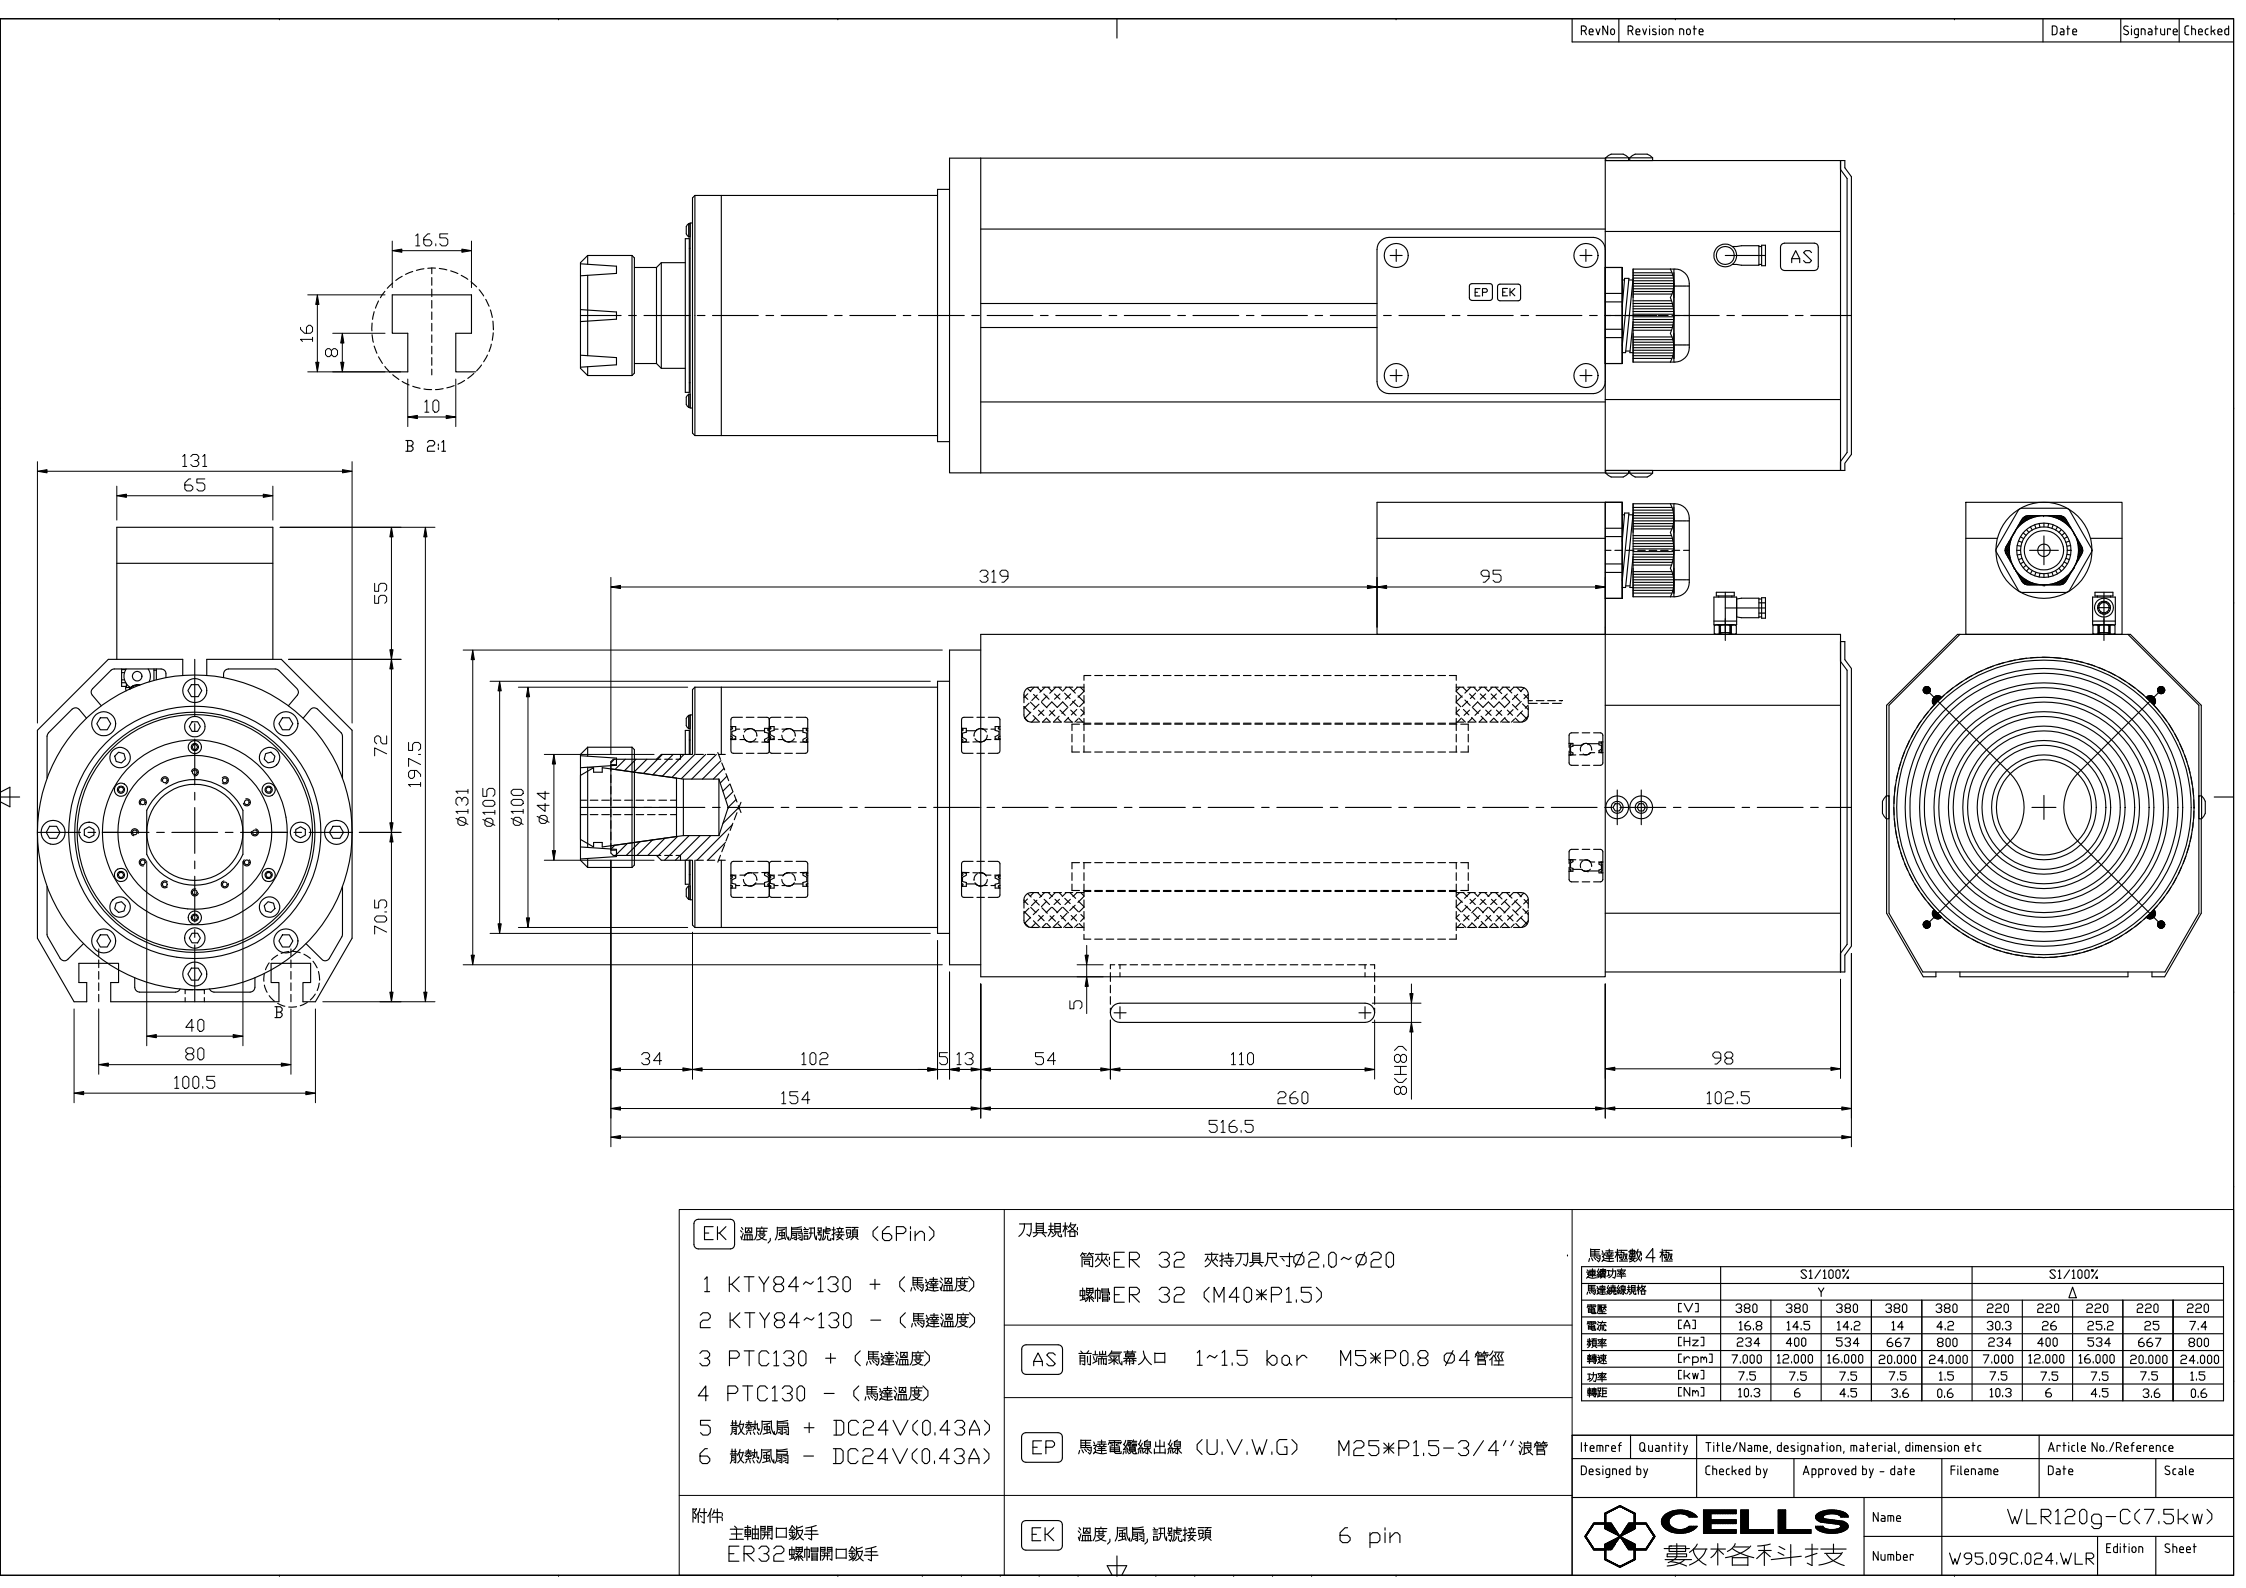

EK

溫度,風扇訊號接頭 (6Pin)

1

KTY84~130 + (馬達溫度)

2

KTY84~130 - (馬達溫度)

3

PTC130 + (馬達溫度)

4

PTC130 - (馬達溫度)

5

散熱風扇 + DC24V<0.43A>

6

散熱風扇 - DC24V<0.43A>

刀具規格

筒夾ER 32 夾持刀具尺寸 $\varnothing$ 2.0~ $\varnothing$ 20

螺帽ER 32 (M40*P1.5)

AS

前端氣幕入口 1~1.5 bar M5*P0.8 $\varnothing$ 4 管徑

EP

馬達電纜線出線 (U,V,W,G) M25*P1.5-3/4'' 浪管

附件

主軸開口鉸手

ER32 螺帽開口鉸手

EK

溫度,風扇,訊號接頭

6 pin



馬達極數 4 極

連續功率 馬達線纜規格	S1/100%					S1/100%				
	Y					A				
電壓 [V]	380	380	380	380	380	220	220	220	220	220
電流 [A]	16.8	14.5	14.2	14	4.2	30.3	26	25.2	25	7.4
頻率 [Hz]	234	400	534	667	800	234	400	534	667	800
轉速 [rpm]	7,000	12,000	16,000	20,000	24,000	7,000	12,000	16,000	20,000	24,000
功率 [kw]	7.5	7.5	7.5	7.5	1.5	7.5	7.5	7.5	7.5	1.5
轉矩 [Nm]	10.3	6	4.5	3.6	0.6	10.3	6	4.5	3.6	0.6

Itemref	Quantity	Title/Name, designation, material, dimension etc	Article No./Reference		
Designed by	Checked by	Approved by - date	Filename	Date	Scale

CELLS

妻父木各系斗才支

Name	WLR120g-C<7.5kw>			
Number	W95.09C.024.WLR	Edition	Sheet	