
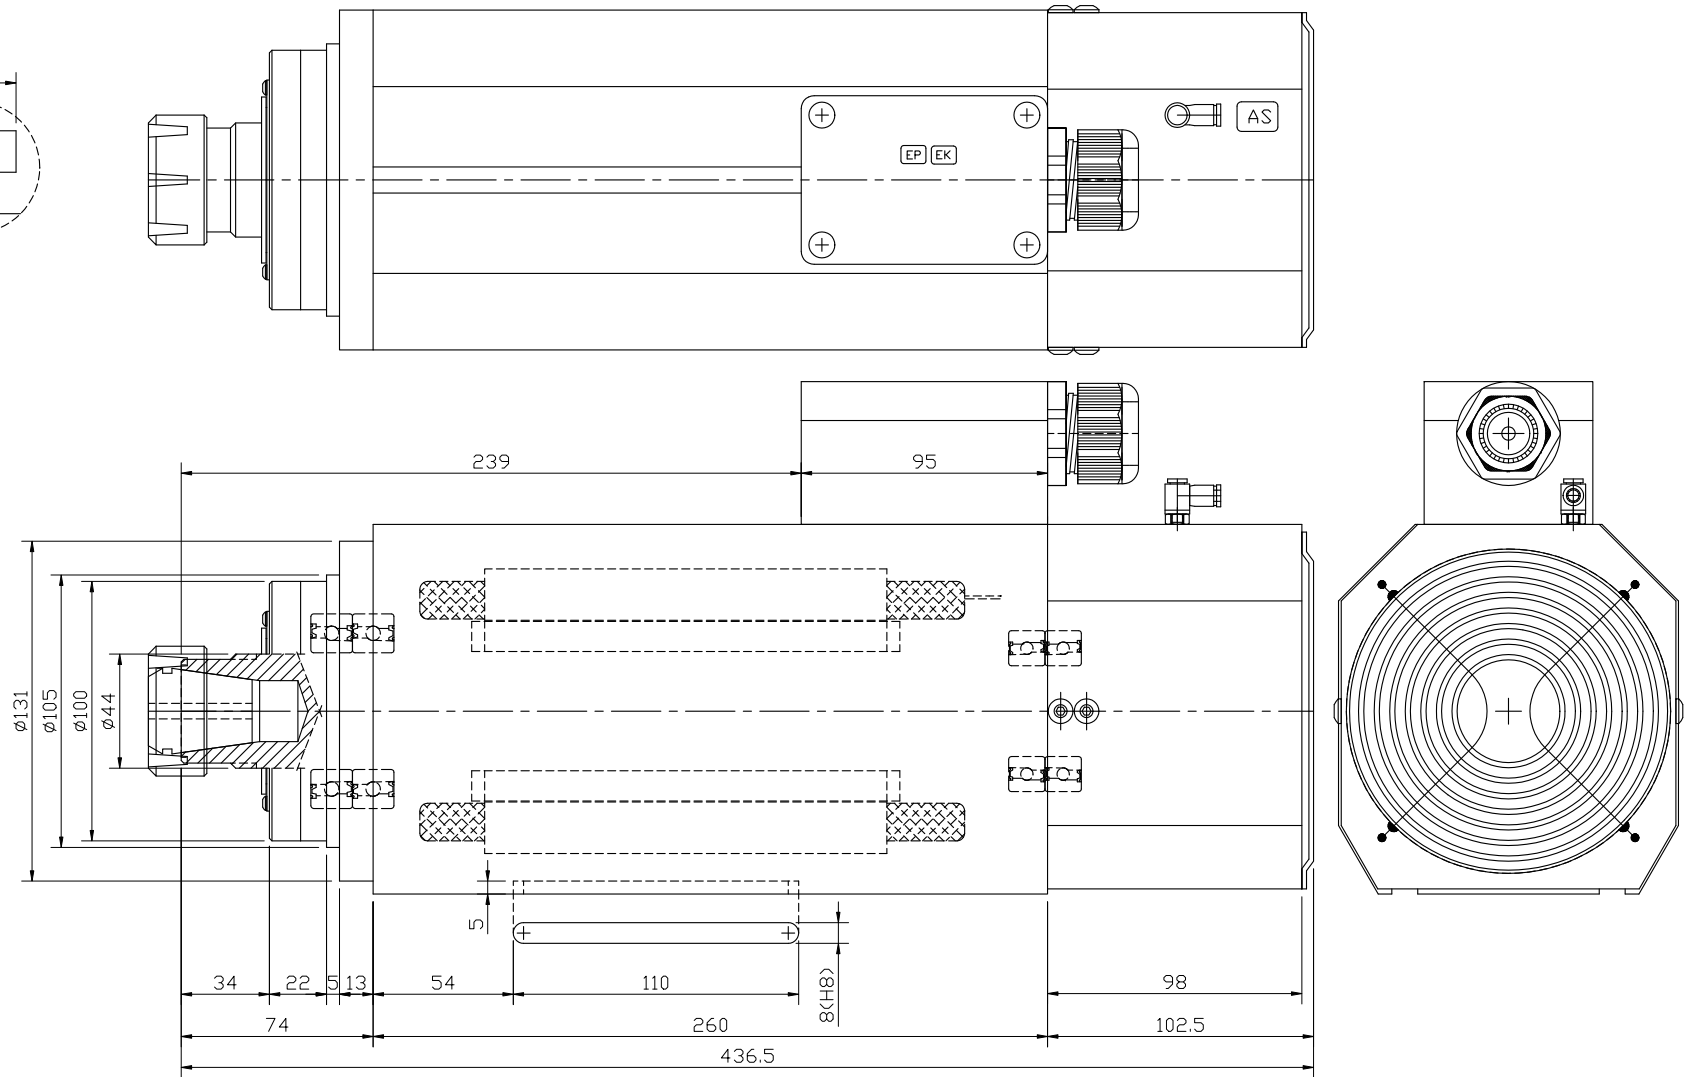


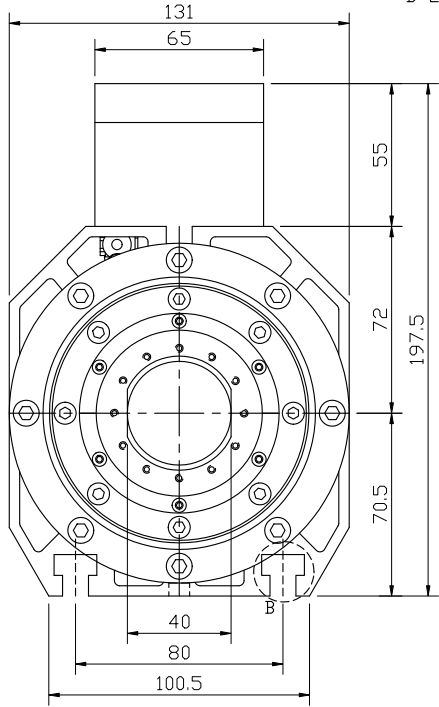

EK 溫度, 風扇訊號接頭 (6Pin)	刀具規格 簡夾ER 32 夾持刀具尺寸 $\phi 2.0 \sim \phi 20$ 螺帽ER 32 (M40*P1.5)		馬達極數 4 極										
1 KTY84~130 + (馬達溫度)			連續功率		S1/100%		S1/100%						
2 KTY84~130 - (馬達溫度)			馬達繞線規格		Y		Δ						
3 PTC130 + (馬達溫度)	AS 前端氣幕入口 1~1.5 bar M5*P0.8 $\phi 4$ 管徑		電壓 [V]	380	380	380	380	220	220	220	220		
4 PTC130 - (馬達溫度)			電流 [A]	16.8	14.5	14.2	14	4.2	30.3	26	25.2	25	7.4
5 散熱風扇 + DC24V<0.43A>			頻率 [Hz]	234	400	534	667	800	234	400	534	667	800
6 散熱風扇 - DC24V<0.43A>	EP 馬達電纜線出線 (U.V.W.G) M25*P1.5-3/4'' 浪管		轉速 [rpm]	7,000	12,000	16,000	20,000	24,000	7,000	12,000	16,000	20,000	24,000
			功率 [kw]	7.5	7.5	7.5	7.5	1.5	7.5	7.5	7.5	7.5	1.5
			轉矩 [Nm]	10.3	6	4.5	3.6	0.6	10.3	6	4.5	3.6	0.6
			Itemref Quantity Title/Name, designation, material, dimension etc Article No./Reference										
			Designed by		Checked by	Approved by - date		Filename	Date	Scale			
附件 主軸開口鉸手 ER32 螺帽開口鉸手	EK 溫度, 風扇, 訊號接頭 	6 pin	 CELLS 婁文木各禾斗支		Name		WSR120g-C<7.5kw>						
					Number		W95.09C.024.WSR	Edition	Sheet				